


CANOPY INSTRUCTIONS


1. LAYOUT AT SITE

Spread drop cloths & unroll canopy at exact position of desired finished assembly. Any sharp objects which must remain on site under the canopy should be padded and taped. Assemble side poles and lay straight out from each pole hole in canopy. Drive a stake 1'-0" from the end of each pole. The stake must be driven through the ring attached to each guy rope as shown.

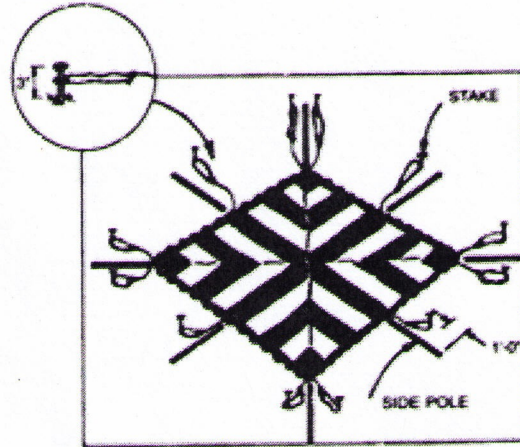


2. RAISE SIDE POLES

Start at opposite corners. Insert side poles into pole holes and raise so that bottom of poles slant toward center of canopy. Adjust guy rope. Continue with other two corners and then sides.

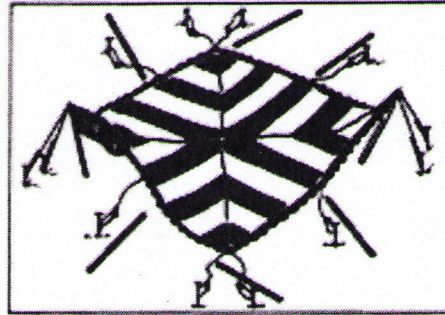


3. RAISE CENTER POLE

Assemble three piece center pole and insert into center pole hole. Raise to upright position and tie off jump rope to pole.

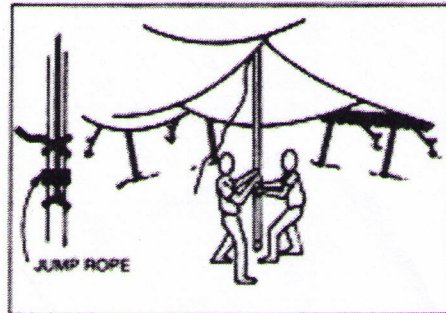

4. SIDE POLE ADJUSTMENT

Tighten guy ropes and then set side poles to upright position. Adjust pole positions and guy rope tension to properly pull out canopy.

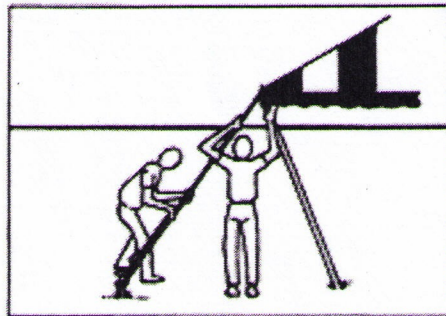

5. TAKE DOWN

Loosen all guy ropes.
Spread drop cloths.
Reverse steps 1 through 4 for disassembly.

IMPORTANT

Check Guys Ropes periodically for tightness and maintaining good condition. Stakes provided are for average soil conditions. Sandy soil or asphalt may require additional staking. Proper installation suitable to site conditions is the responsibility of the installer. Store canopy in a cool, dry area.
Never store while wet or damp.